



INSTALLATION TYPES

Nube / Nuvola / Stella / Sirio / Eclisse


01. Motor on the hood




02. Slim motor




03. Remote under-roof motor




04. Outdoor motor

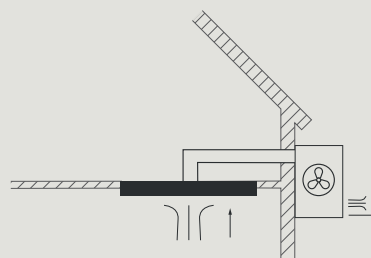

05. Under-roof motor or outdoor motor with junction



06. Slim motor and ceiling re-circulation filtering kit



**01.
Motor on the hood**
 ›KACL.798#41F* - 950 m³/h
 ›KACL.770#41F* - Brushless 1100 m³/h

**02.
Slim motor on the hood**
 ›KACL.782#49F* - Slim 800 m³/h

**03.
Remote under-roof motor with round pipes**
 To be used with Ø150 mm pipes
 ›KACL.798#41F* - 950 m³/h
 ›KACL.770#41F* - Brushless 1100 m³/h
 ›KACL.797#4AF* - 1300 m³/h
 To be used with Ø200 mm pipes and bracket
 (KACL.396)

**04.
Outdoor motor with round pipes**
 ›KACL.786#41F* - 1000 m³/h
 To be used with Ø150 mm pipes
 ›KACL.796#4AF* - 1500 m³/h
 To be used with Ø200 mm pipes and bracket
 (KACL.396)

**05.
Under-roof motor or outdoor motor with
junction on the hood and rectangular pipes**
 ›KACL.798#41F* - 950 m³/h
 ›KACL.770#41F* - Brushless 1100 m³/h
 ›KACL.786#41F* - 1000 m³/h (outdoor motor)
 ›KACL.789 - Junction for rectangular pipes
 ›KACL.376 - Circular and rectangular Junction 220x90


**06.
Slim motor and ceiling re-circulation
filtering kit**
 The new ceiling re-circulation filtering kit allows the installation of all ceiling hoods (Eclisse/ Nube/ Nuvola/Stella) in filtering mode. The ceiling re-circulation filtering kit can be used only with a slim motor placed on the hood and rectangular pipes.
 ›KACL.953
 ›KACL.939#BF - Ceiling re-circulation
 ›KACL.782#49F* - Slim 800 m³/h

*European code

Directional air outlets



Motor
5 directions



Slim motor
4 directions

(According to the position of the motor)

falmec