

NW 508



Modular Ice Machine 215 kg

Item #:
Project:
Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 508
Dice 10 g
W 22 x D 22 x H 22 mm



NW H 508
Half Dice 6 g
W 10 x D 22 x H 28 mm



NW L 508
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
NW 508	✓	SB193	129
	✓	SB322	168
	CBT30EMCD	SB393	181
	CBT30EMCD	SB530	243

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 215 kg


NW 508



Modular Ice Machine 215 kg

Item #:
Project:
Quantity:

Modular Ice Machine 215 kg

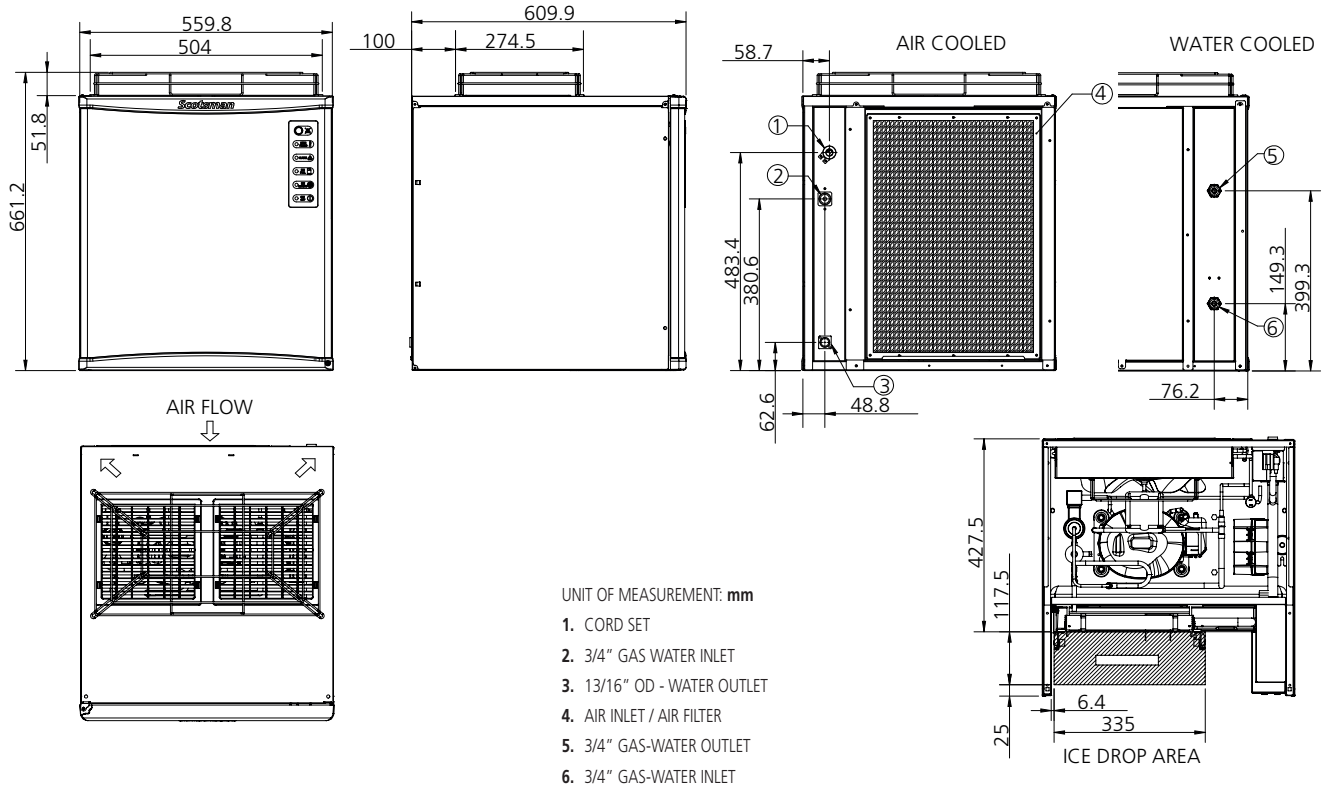

UNIT DATA		SHIPPING DATA		All data refer to R404A refrigerant models								
Size (W x D x H)		560 x 610 x 609 mm		Carton (W x D x H)		620 x 680 x 800 mm						
Net weight		67 kg		Weight		77 kg						
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A	
NW 508 AS	230/50/1	215	200	150	16.3	24.5	10.3	1250	2600	3 x 1.5	16	
NW H 508 AS	230/50/1	225	205	155	14.8	22.9	10.1	1250	2600	3 x 1.5	16	
NW L 508 AS	230/50/1	210	200	145	15.9	23.0	9.7	1250	2600	3 x 1.5	16	
NW 508 WS	230/50/1	220	210	180	9.7	17.5	152.1	1250	2600	3 x 1.5	16	
NW H 508 WS	230/50/1	210	205	170	8.6	14.6	110.1	1250	2600	3 x 1.5	16	
NW L 508 WS	230/50/1	210	200	170	9.9	16.9	109.3	1250	2600	3 x 1.5	16	

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions